



CONSTRUCTION:

- Plastic base
- Metal rotor

OPERATING TEMPERATURE:

Ball bearing -30°C to + 75°C


INSULATION RESISTANCE:

10 meg Ohm min. at 500 VDC
(between frame and terminal)

DIELECTRIC STRENGTH:

5 mA max. at 500 VAC 60Hz one minute
(between frame and terminal)

Dimensions (mm)

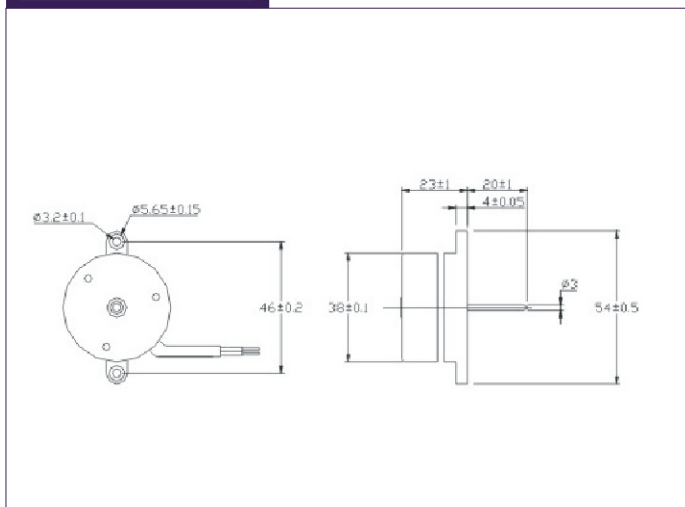

Specifications

MODEL NO.	BEARING	RATED VOLTAGE	OPERATING VOLTAGE RANGE	RATED CURRENT	RATED INPUT POWER	SPEED	Mass
		VDC	V	A	W	R.P.M.	g
JIB0412LL	BALL	12	10.2~13.8	0.11	1.32	4900	60
JIB0412LM	BALL	12	10.2~13.8	0.12	1.44	5700	
JIB0412LH	BALL	12	10.2~13.8	0.14	1.68	6400	
JIB0412RL	BALL	12	10.2~13.8	0.11	1.32	4900	
JIB0412RM	BALL	12	10.2~13.8	0.12	1.44	5700	
JIB0412RH	BALL	12	10.2~13.8	0.14	1.68	6400	
JIB0424LL	BALL	24	20.4~27.6	0.11	2.64	4900	
JIB0424LM	BALL	24	20.4~27.6	0.12	2.88	5700	
JIB0424LH	BALL	24	20.4~27.6	0.13	3.12	6400	
JIB0424RL	BALL	24	20.4~27.6	0.11	2.64	4900	
JIB0424RM	BALL	24	20.4~27.6	0.12	2.88	5700	
JIB0424RH	BALL	24	20.4~27.6	0.13	3.12	6400	

Specifications are subject to change without notice. Please visit our web site at <http://www.centron-fan.com>