

## C7530 BLOWER SERIES



### SIZE :

75x75x30mm (2.95"x2.95"x1.18")

### CONSTRUCTION :

Glass fiber reinforced plastic:

Impeller and housing PBT are UL 94V-0 rating

### OPERATING TEMPERATURE :

Ball bearing - 30°C to + 75°C

\*Minimum ambient temperature -15°C , admissible for a short time at -30°C ; without reaching dew point.

Sleeve bearing - 10°C to + 60°C

### FUNCTION :

frequency generator or rotation detection signal option

### WEIGHT :

76,5 grams


## Specifications

Specifications are subject to change without notice

MODEL NO.	BEARING	RATED VOLTAGE	RATED CURRENT	RATED INPUT POWER	SPEED R.P.M.	MAX. AIR FLOW		MAX. AIR PRESSURE		NOISE dB-A
		VDC	A	W		m <sup>3</sup> min	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	
CB753012L	Ball	12	0.10	1.20	1500	0.167	5.91	2.13	0.084	23.10
CS753012L	Sleeve									
CB753012M	Ball	12	0.20	2.40	2500	0.272	9.61	7.19	0.283	32.80
CS753012M	Sleeve									
CB753012H	Ball	12	0.30	3.60	3000	0.33	11.64	12.68	0.499	37.70
CS753012H	Sleeve									
CB753024L	Ball	24	0.09	2.16	1500	0.167	5.91	2.13	0.084	23.10
CS753024L	Sleeve									
CB753024M	Ball	24	0.13	3.12	2500	0.272	9.61	7.19	0.283	32.80
CS753024M	Sleeve									
CB753024H	Ball	24	0.17	4.08	3000	0.33	11.64	12.68	0.499	37.70
CS753024H	Sleeve									
CB753048M	Ball	48	0.10	4.80	2500	0.272	9.61	7.19	0.283	32.80
CS753048M	Sleeve									
CB753048H	Ball	48	0.14	6.72	3000	0.33	11.64	12.68	0.499	37.70
CS753048H	Sleeve									

\*Long life bearing is available

Performance Curve

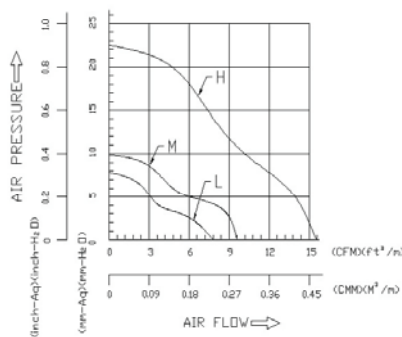

Dimensions (mm)

